

Crystal LTD TM SPEC Form

[www.crystaltherm.com](http://www.crystaltherm.com)

Customer


PO#

PO date

Thermoelectric module (TM) specification

PO position #	TM	Internal Solder Melting Temp, C	Max operating temperature, °C		Parameters in vacuum at hot side temperature 25 °C				Rac at 25 °C		Ceramic size, mm		TM Height		Wire			Sealing
			short time	continuous operation	I <sub>max</sub> , A	U <sub>max</sub> , V	Q <sub>max</sub> , W	dT <sub>max</sub> , K	Rac, Ohm	Tolerance ±, %	A/A1	B	Height, mm	Tolerance t, ± mm	S, AWG #	Length, mm	Tolerance ±, mm	
1	D-288-10-08-L2	138	130	115	5.8	36.7	131.0	71.0	4.84	10	40/44	40	3.10	0.02	20	100	5	
	D-288-10-08-L2 label version																	

Clamping force: 34.8 - 69.5 kg

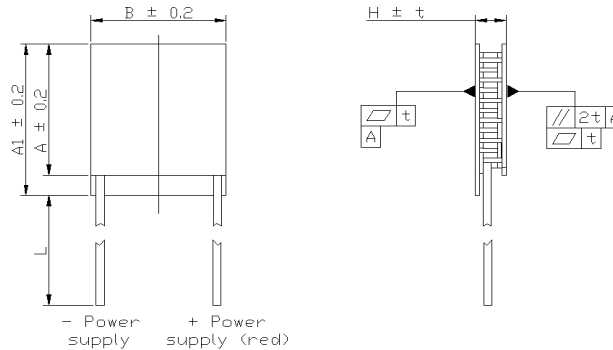

[www.crystaltherm.com](http://www.crystaltherm.com)

Max dT is reduced by 2-3K for silicon sealed and 1-2K for epoxy sealed versions.



### U(dT) at Thot=298K

