

Crystal LTD TM SPEC Form

www.crystaltherm.com

Customer


PO#

PO date

Thermoelectric module (TM) specification


PO position #	TM	Internal Solder Melting Temp, C	Max operating temperature, °C		Parameters in vacuum at hot side temperature 25 °C				Rac at 25 °C		Ceramic size, mm		TM Height		Wire			Sealing
			short peak	continuous operation	I _{max} , A	U _{max} , V	Q _{max} , W	dT _{max} , K	Rac, Ohm	Tolerance ±, %	A1/A2/A3	B1/B2/B3	Height, mm	Tolerance t, ± mm	S, AWG #	Length, mm	Tolerance ±, mm	
1	3-229-14-15-L2	138	130	115	3.7	15.5	10.8	109	4.02	10	40/30/20	40/30/20	10.50	0.02	22	100	5	
																		PVC

Clamping force: 8.4 - 16.8 kg

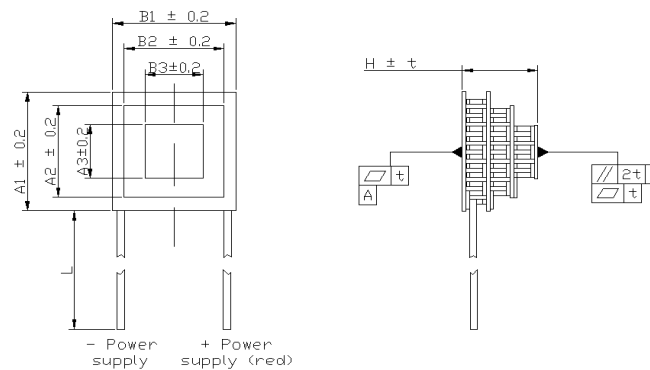

www.crystaltherm.com

Max dT is reduced by 2-3K for silicon sealed and 1-2K for epoxy sealed versions.

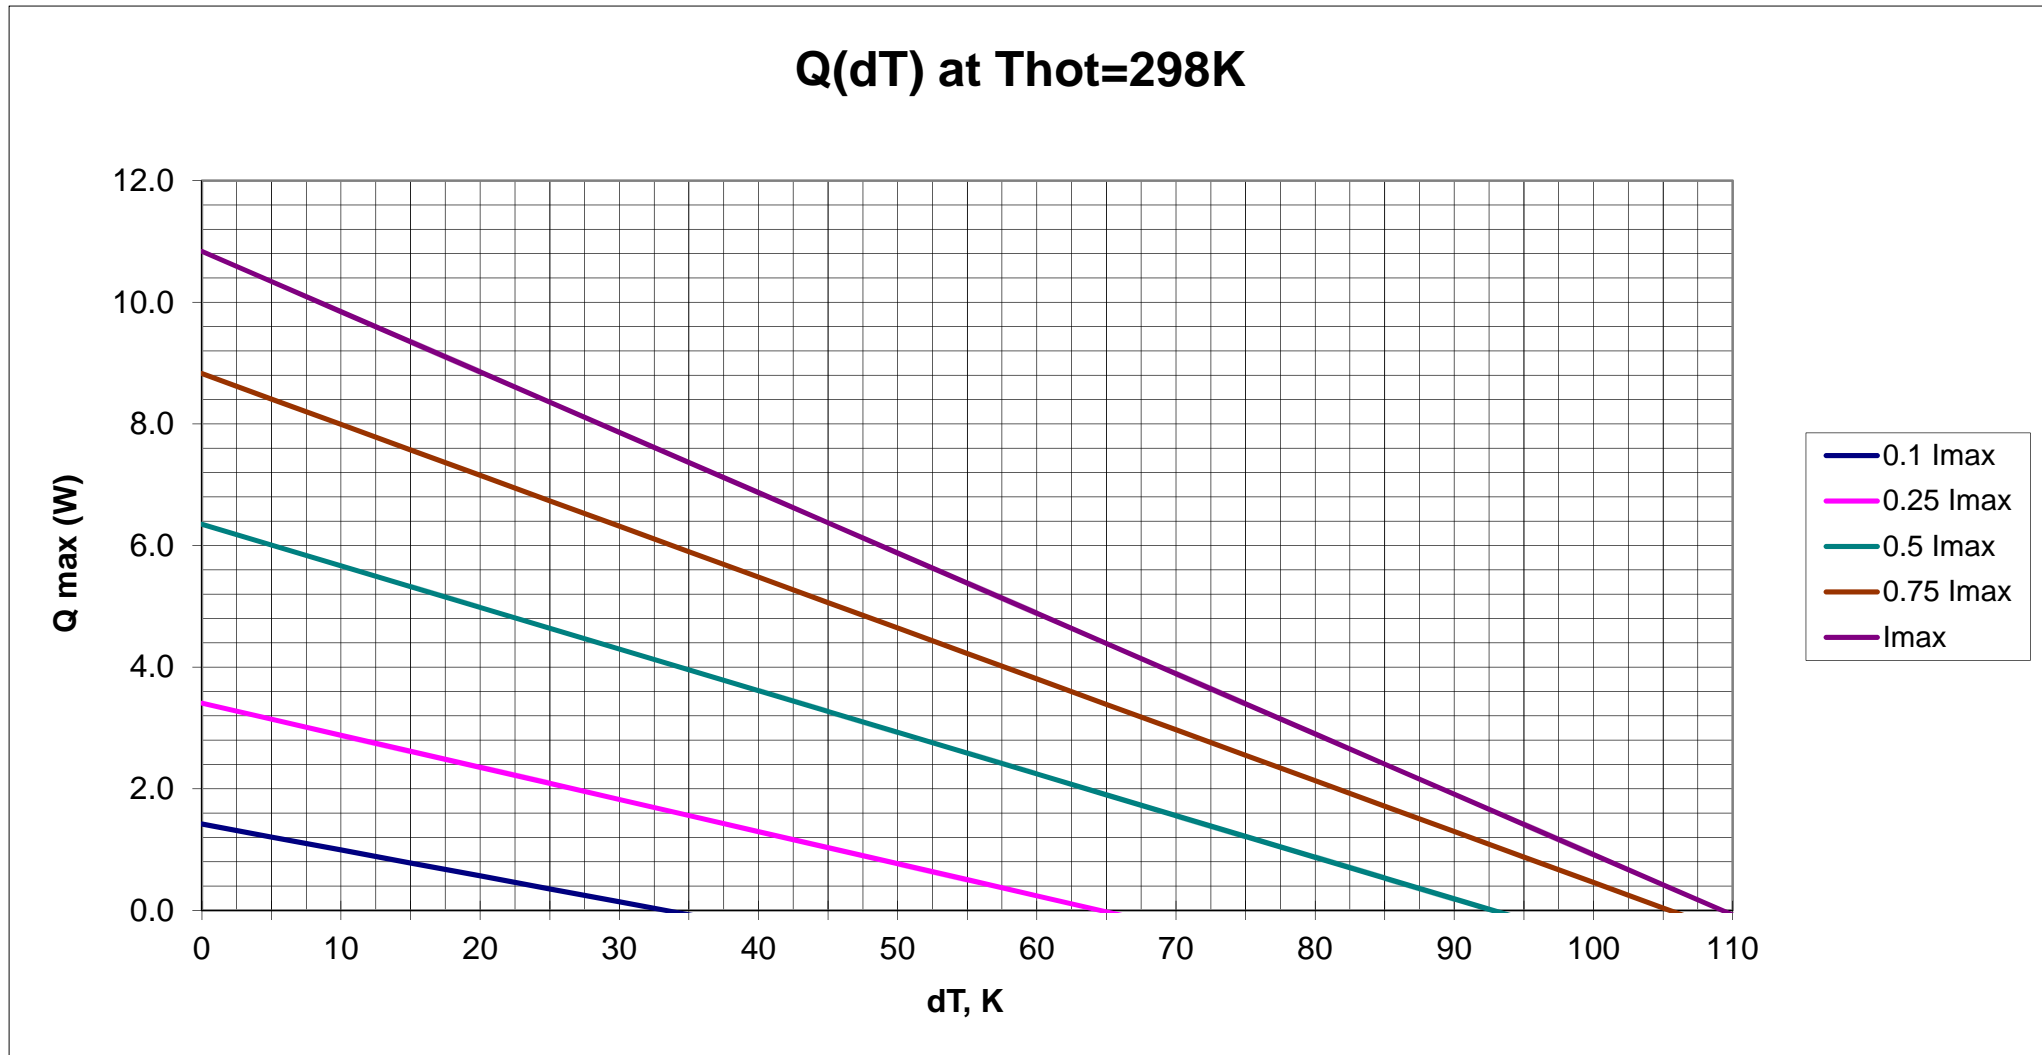

U(dT) at $T_{hot}=298K$

