

Crystal LTD TM SPEC Form

[www.crystaltherm.com](http://www.crystaltherm.com)

Customer


PO#

PO date

Thermoelectric module (TM) specification


PO position #	TM	Internal Solder Melting Temp, C	Max operating temperature, °C		Parameters in vacuum at hot side temperature 25 °C				Rac at 25 °C		Ceramic size, mm		TM Height		Wire			Sealing	
			short time	long time	Imax, A	Umax, V	Qmax, W	dTmax, K	Rac, Ohm	Tolerance ±, %	A/A1	B	Height, mm	Tolerance t, ± mm	S, AWG #	Length, mm	Tolerance ±, mm		
1	D-288-14-11-L2	138	130	115	7.9	36.7	179.7	72.5	3.52	10	52/56	52	3.80	0.02	20	100	5		
	porch style version																	PVC insulated	
2	D-288-14-11-L2	138	130	115	7.9	36.7	179.7	72.5	3.52	10	52/52	52	3.80	0.02	20	100	5		
																		PVC insulated	

Clamping force: 68.1 - 136.3 kg

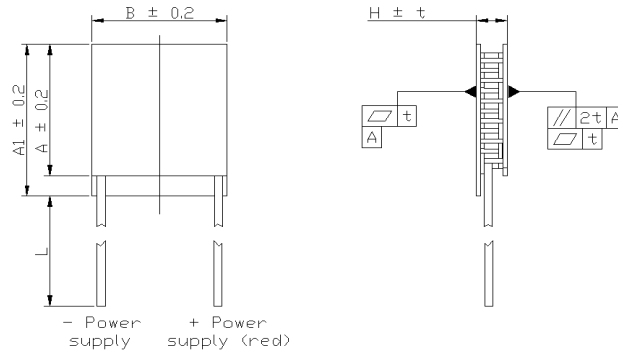

[www.crystaltherm.com](http://www.crystaltherm.com)

Max dT is reduced by 2-3K for silicon sealed and 1-2K for epoxy sealed versions.

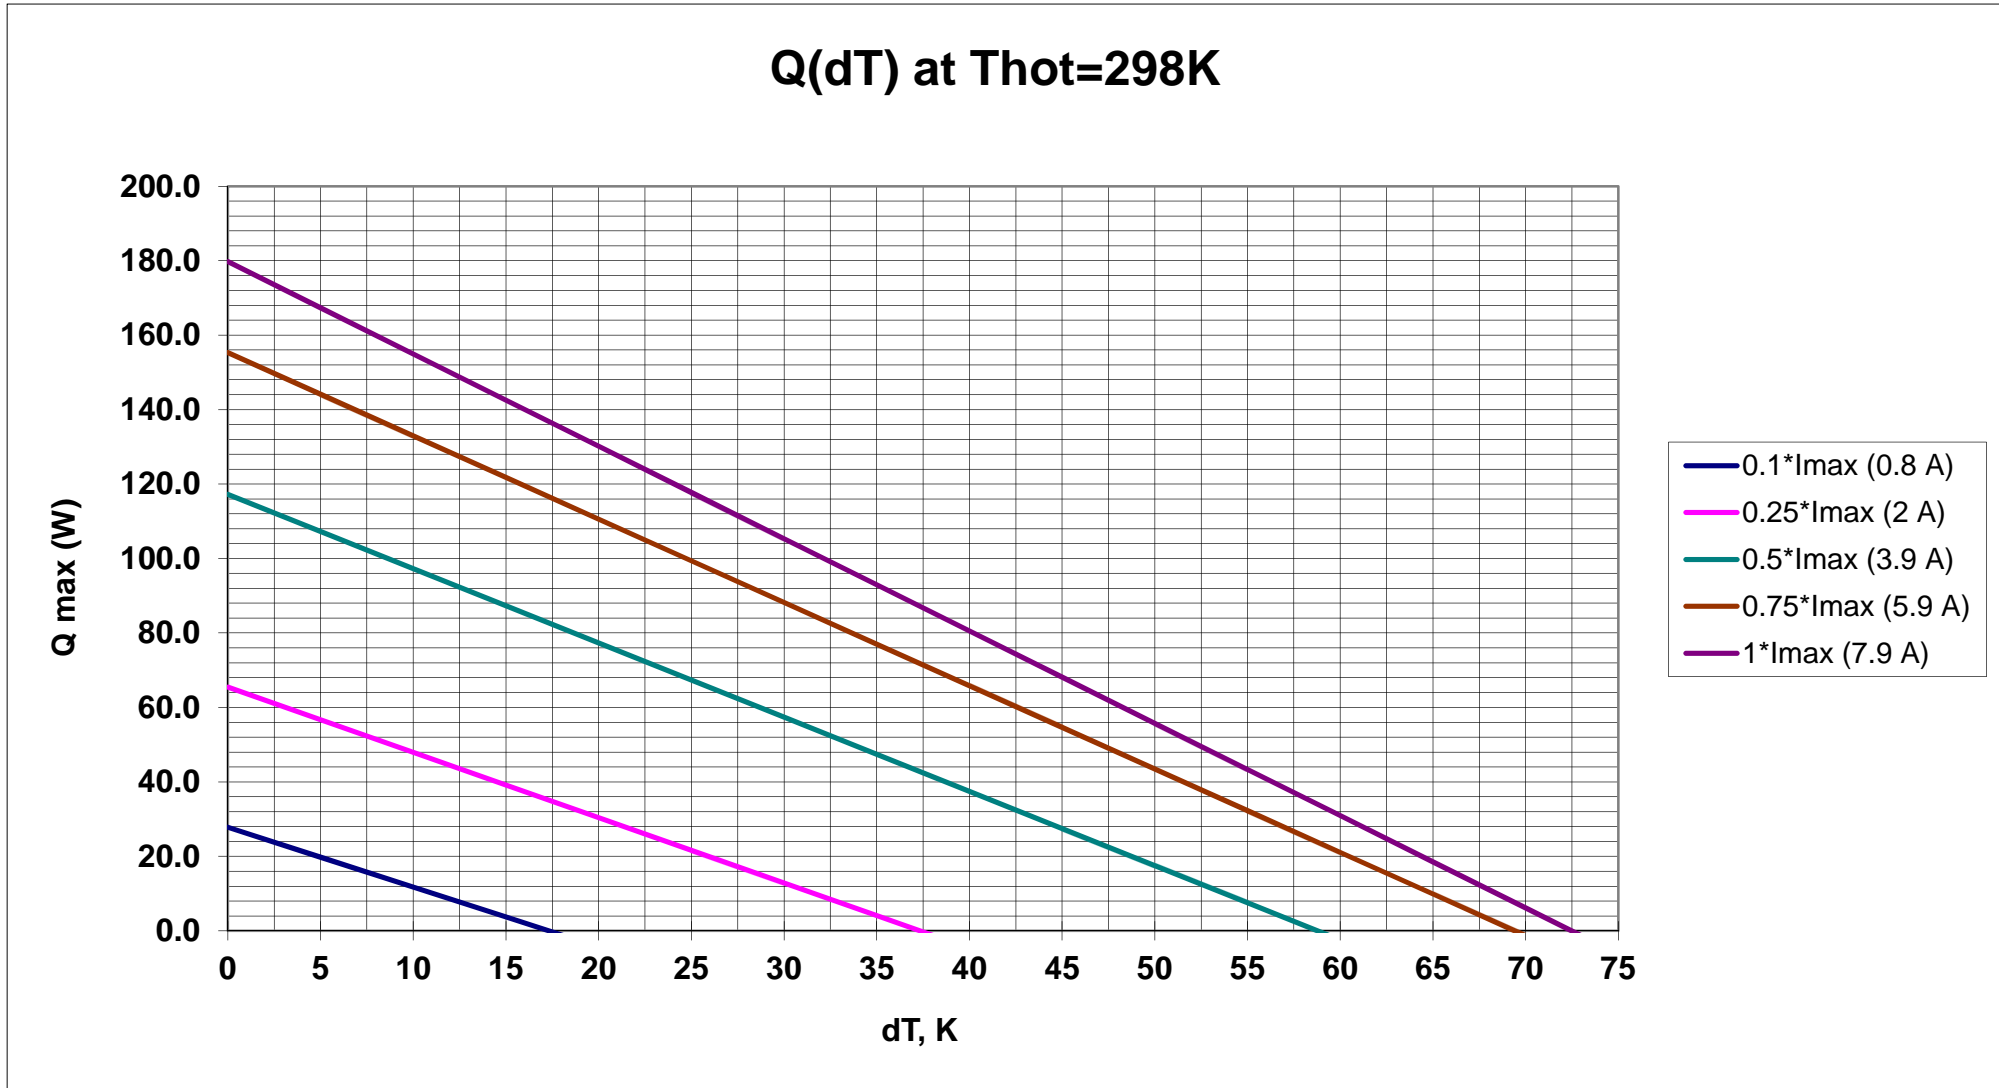

### U(dT) at $T_{hot}=298K$

